
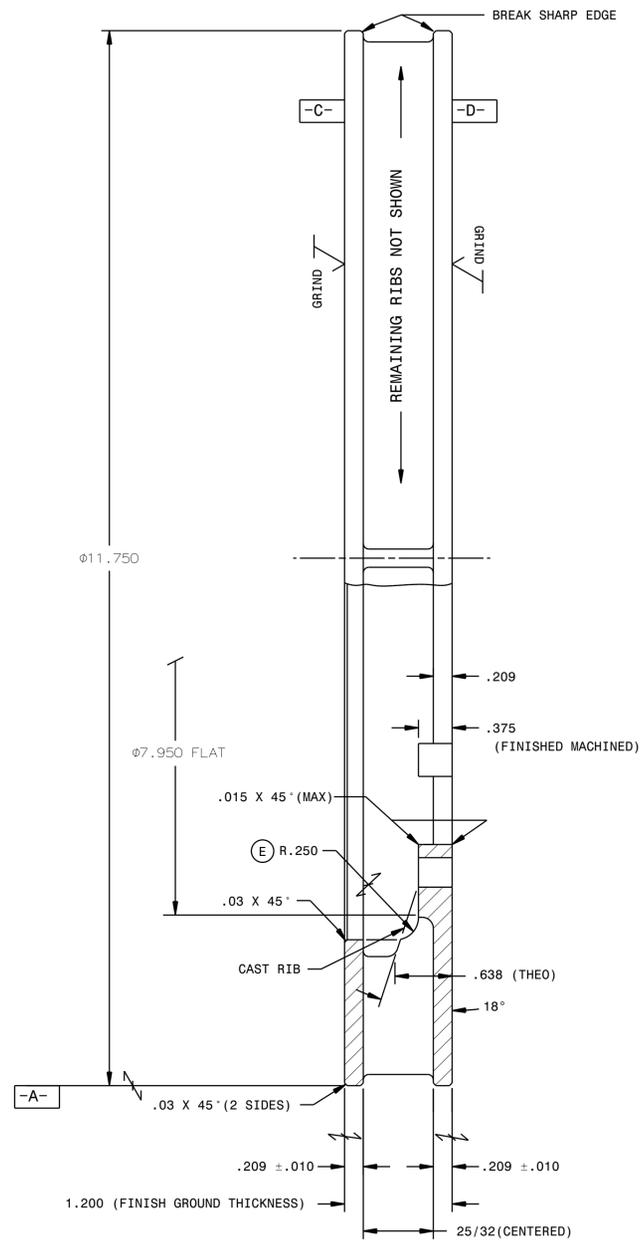


REVISIONS			
ISSUE	CHANGE	DATE	BY
G	INCREASED RADIUS	9/5/01	BEM/VW

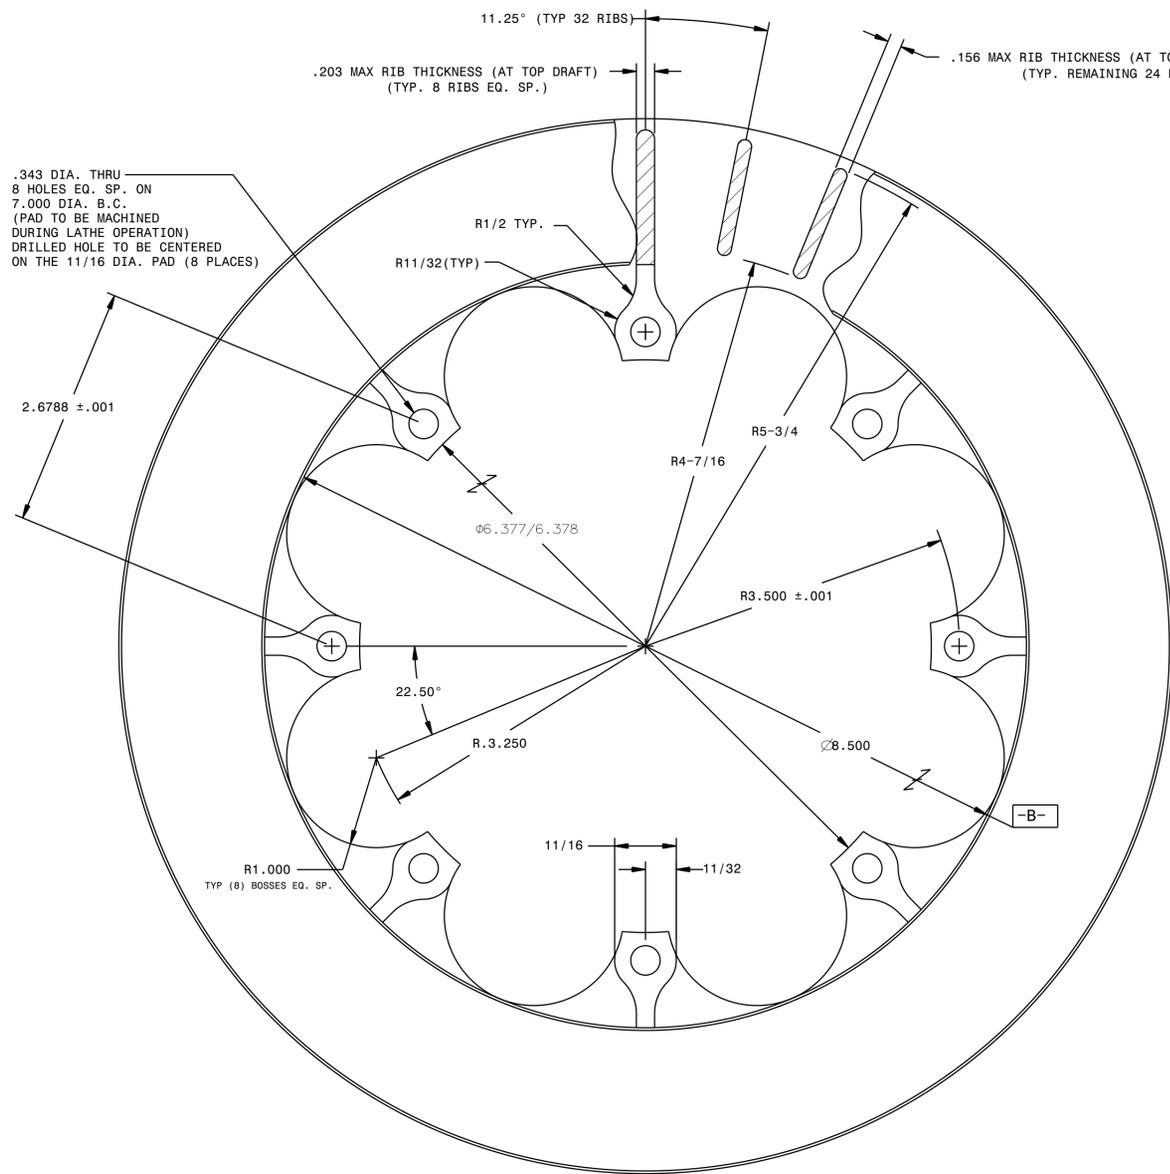

- NOTES:
1. MATERIAL TO BE CAST IRON, TYPE 35 (G3500B OR 3500C), HARDNESS Bhn 207-255
 2. DENOTES MACHINED SURFACE
 3. CAST SURFACE FINISH TO BE 250 MICRO-INCHES (6.3 Ra)
 4. MACHINED SURFACES TO BE 63 MICRO-INCHES (1.6 Ra)
 5. GROUND SURFACES TO BE 32 MICRO-INCHES (0.8 Ra)
 6. ALL FILLETS AND RADII 1/16 U.O.N.
 7. DIAMETERS -A-, AND -B- MUST BE CONCENTRIC WITH O.D. OF FINS WITHIN .030 T.I.R.
 8. SURFACES -C-, AND -D- MUST BE PARALLEL & SQUARE WITHIN .001 T.I.R.
 9. DEBURR ALL SHARP EDGES .010 X 45°
 10. FINISHED WEIGHT OF ROTOR IS 7.81 LBS [3.54 KGS]
 11. SURFACES -C- AND -D- MUST BE GROUND AS SHOWN 100%, ANY STEPS OR SHOULDERS WILL NOT BE ACCEPTABLE
 12. INDIVIDUAL ROTORS ARE TO BE PACKAGED IN HERMETICALLY SEALED PLASTIC OR FOIL BAGS, AND PACKAGED IN CARDBOARD BOXES MARKED WITH PART NUMBER AND COUNTRY OF ORIGIN.

PART MUST BE PARALLEL, PERPENDICULAR, AND CONCENTRIC WITHIN .002 T.I.R. U.O.N.			
ALL DIMENSIONS APPLICABLE AT 68°F/20°C DIMENSIONAL TOLERANCE U.O.N.			ROTOR
FRACTION	DECIMAL	ANGULAR	
±1/64	±.001	±30 SEC.	
LAYOUT #	SCALE	DRAWN	DATE
6608GM.DWG	7/8	B. RINEHART	06/11/87
SIZE	DRAWING NUMBER	ISSUE	
C	6608GM	G	